


HYDRAULIC CIRCULAR SAW MODEL SHC 140, MODEL SHC 165

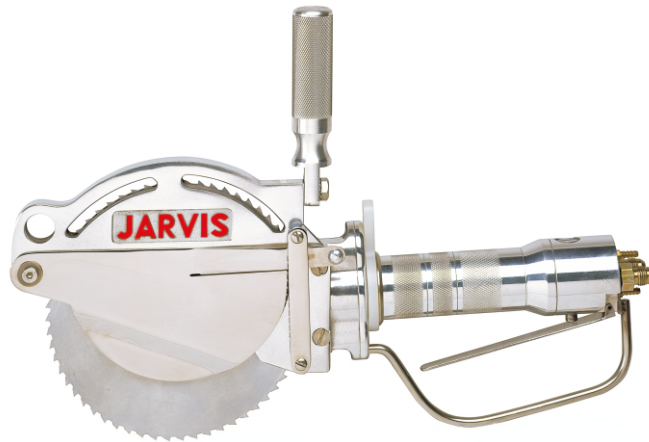

The Jarvis Model SHC 140 and SHC 165 - hydraulic powered general purpose breaking saws.

JARVIS®

- The right or left handed SHC 140, with a 1.5 in (38 mm) cutting depth, or SHC 165 with a 2 in (51 mm) cutting depth are ideally suited for:
 - Beef : Breaking forequarters and beef plates, also hot and cold ribbing.
 - Pork : ham and shoulder marking, ribbing and chine bone removal.
- Lightweight with hydraulic power - no bogging down, no motor icing, low noise and vibration.
- Heavy duty gears made to withstand all user in the packing plant industry.
- Rugged, corrosion resistant construction for optimum hygiene.
- Lever style adjustable depth gauge for precise depth control cutting.
- Meets national and international requirements for hygiene and safety.



THE SHC SAWS - ULTIMATE POWER, EXCELLENT HANDLING

AIG GROUP

JARVIS®

HEADQUARTER

PT ARSI INDO GRAHA
INDONESIA

☎ +6281270762750

✉ info@arsiindograha.com

🌐 www.arsiindograha.com

GLOBAL OFFICE

RC INDO GROUP LIMITED
RWANDA

☎ +250793885693

✉ info@rcrwanda.com

🌐 www.rcrwanda.com

ARSYI GLOBAL L.L.C-FZ
DUBAI

☎ +971507169760

✉ info@arsyi.com

🌐 www.arsyi.com

HYDRAULIC CIRCULAR SAW MODEL SHC 140, MODEL SHC 165

Specifications		
Drive		Hydraulic
Models SHC 140 / SHC 165		
Motor Power	2.5 hp	1865 W
Blade Speed at 3.5 gpm		2725 rpm
Control Handle	Single Trigger	Pneumatic
Blade Diameter		
SHC 140	5.5 in	140 mm
SHC 165	6.5 in	165 mm
Cutting Depth (maximum)		
SHC 140	1.5 in	38 mm
SHC 165	2.0 in	51 mm
Overall Length	16.5 in	419 mm
Weight	7 lbs	3.2 kg
Vibration	less than (<) 100 dB	<0.1 m / sec ²
Noise (one meter from tool)		87 dB
Hydraulic Power Unit		
Motor Power	5 hp	3728 W
Operating Voltage	460 / 230 V, 3 phase, 60 Hz	
	all voltages and 50 Hz available	
Hose Length	16 ft	5 m
Oil Capacity	20 gal	76 L
Oil Flow Rate	3.5 gpm	13.2 Lpm
Overall Dimensions (W x L x H)	28 x 23 x 28 in	711 x 584 x 711mm
Weight	225 lbs	102 kg
Equipment Selection and Accessories		Order Number
Model SHC 140	Right Hand - Standard	4007028
	Left Hand	4007037
	Ergonomic	4007052
Model SHC 165	Right Hand - Standard	4007029
	Left Hand	4007032
	Ergonomic	4007053
Hydraulic Power Unit with hydraulic hoses and control box		
	460 / 230 V, 3 phase, 60 Hz	4027271
	440 / 415 / 380 / 220 V, 3 phase, 50 Hz	4027274
	575 V, 3 phase, 60 Hz	4027283
Blades		
SHC 140	5.5 in / 140 mm diameter blade - 120 teeth	1023362
	5.5 in / 140 mm diameter blade, skip tooth blade - 60 teeth	1023363
SHC 165	6.5 in / 165 mm diameter blade - 140 teeth	1023324
	6.5 in / 165 mm diameter blade, skip tooth blade - 60 teeth	1023308
Optional:	"T" Handle - Right Hand - Standard	3019218
	"T" Handle - Left Hand	3019217
Balancer		4042033



HEADQUARTER

PT ARSI INDO GRAHA
INDONESIA

+6281270762750

info@arsiindograha.com

www.arsiindograha.com

GLOBAL OFFICE

RC INDO GROUP LIMITED
RWANDA

+250793885693

info@rcrwanda.com

www.rcrwanda.com

ARSYI GLOBAL L.L.C-FZ
DUBAI

+971507169760

info@arsyi.com

www.arsyi.com