


CARCASS DRESSING CONVEYOR



Which is mainly used to assist cattle carcass processing on the conveyor rail for breast pre-skinning, skin removal, breast opening, viscera removal, and so on.

Rated voltage	380VAc
Controlli voltage	24VDc
Driving power	2.2Kw
Air consumption	5L/Time
The conveying speed is fixed, and the working position stop time is adjustable	
Distance of working position	2400mm
Air cylinder	EB-215-215
Hoist cylinder	TQGA-160X50-FA

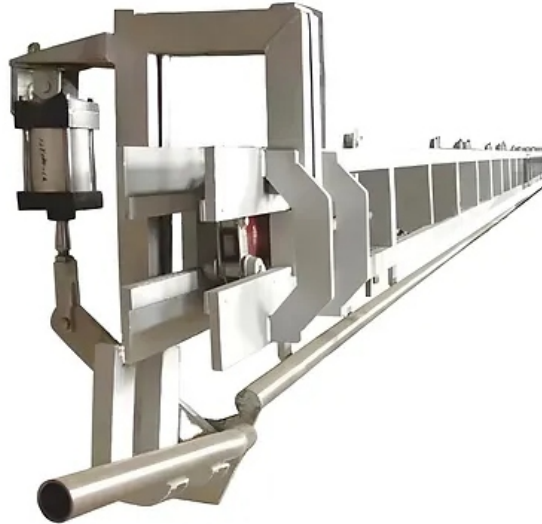

HEADQUARTER

PT ARSI INDO GRAHA
INDONESIA

+6281270762750
info@arsiindograha.com
www.arsiindograha.com

GLOBAL OFFICE

RC INDO GROUP LIMITED
RWANDA

+250793885693
info@rcrwanda.com
www.rcrwanda.com

ARSYI GLOBAL L.L.C-FZ
DUBAI

+971507169760
info@arsyi.com
www.arsyi.com