

NON-PENETRATING PNEUMATIC STUNNER

MODEL USSS-22A


Part Number : 4044135



The Jarvis Model USSS-22A-Pneumatically operated high speed, non- penetrating stunner

- Unique design renders the stunned animal insensible to pain, without penetrating the skull.
- Larger stunning rod diameter with less skull damage.
- One shot humane stunning procedure.
- Five to ten percent faster bolt speed.
- Better stunning for improved meat quality.
- More accurate head contact.
- Easy to handle and operate for less operator fatigue.
- Easy to repair, maintain and clean.
- Lightweight - tool only weighs 36 pounds (16.5 kg).

U.S. Patent Nos. 6,135,871; 9,661,859; 9,743,678; 9,687,003; 9,854,815, 9,854,816

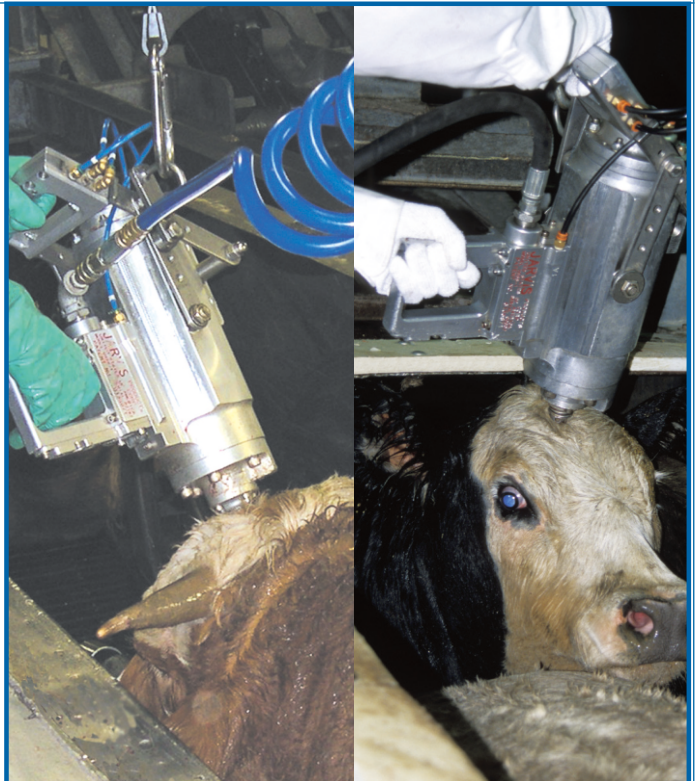

HEADQUARTER

PT ARSI INDO GRAHA
INDONESIA

☎ +6281270762750
✉ info@arsiindograha.com
🌐 www.arsiindograha.com

GLOBAL OFFICE

RC INDO GROUP LIMITED
RWANDA

☎ +250793885693
✉ info@rcrwanda.com
🌐 www.rcrwanda.com

ARSYI GLOBAL L.L.C-FZ
DUBAI

☎ +971507169760
✉ info@arsyi.com
🌐 www.arsyi.com

NON-PENETRATING PNEUMATIC STUNNER

MODEL USSS-22A

Part Number : 4044135

Model USSS-22A		
Normal Operating Pressure	190 - 245 psi	13.1 - 16.9 bar
Max. Operating Pressure	250 psi	17.2 bar
Air Consumption / cycle @ 175 psi / 12.1 bar	0.63 - 0.83 ft ³	17.8 - 23.5L
Non-Penetrating striking end shaft diameter	2.125 in	54 mm
Rod shaft diameter	1.375 in	35 mm
Shaft Velocity @ 175 psi (12.1 bar)	95 ft / sec	29 m / sec
Control Handles	Dual Triggers / Dual Handles	Pneumatic
Overall Dimensions (l x w x h)	20.9 x 9 x 17.5 in	531 x 229 x 445 mm
Weight (knocker box side handle)	37.2 lbs	16.9 kg
Weight (knocker box rear handle)	39.2 lbs	17.8 kg
Weight (restrainer rear handle)	37.8 lbs	17.1 kg

Equipment Selection and Accessories		Order Number
Model USSS-22A Non-Penetrating Pneumatic Stunner	for use in restrainer rear handle knocker box side handle knocker box	4044135 4044136 4044137
Air Compressor (250 psi)	5 hp	10 hp
460 V / 60 Hz 380 V / 50 Hz 575 V / 60 Hz 380 V / 60 Hz 415 V / 50 Hz 230 V / 60 Hz 220 V / 50 Hz	4061361 4061362 4061363 4061364 4061378 4061376 4061377	4061366 4061379 4061382 4061380
Model AST-112 Stunner Tester (includes test stand and control box)		
	115V 230V	4016025 4016026
Model MSPR-1 Three-Way Pressure Setting Air Regulator, with Filter and Lubricator		
	120 V 230 V	3063663 3063664
Air Hose Assembly (25 ft / 7.6 m)		
	Coiled Straight	3059045
Air Filter-Regulator-Lubricator 3022100		3022100
Balancer		4042035



JARVIS®

HEADQUARTER

PT ARSI INDO GRAHA
INDONESIA

+6281270762750

info@arsiindograha.com

www.arsiindograha.com

GLOBAL OFFICE

RC INDO GROUP LIMITED
RWANDA

+250793885693

info@rcrwanda.com

www.rcrwanda.com

ARSYI GLOBAL L.L.C-FZ
DUBAI

+971507169760

info@arsyi.com

www.arsyi.com


NON-PENETRATING PNEUMATIC STUNNER MODEL USSS-22A Part Number : 4044135



Jarvis Model USSS-22 – Stunner Pneumatik Kecepatan Tinggi Tipe Non-Penetrasi

Nomor Paten Amerika Serikat:
6,135,871; 9,661,859; 9,743,678;
9,687,003; 9,854,815, 9,854,816

- Desain unik yang membuat ternak kehilangan kesadaran terhadap rasa sakit tanpa menembus tulang tengkorak ternak.
- Diameter **stunning rod** yang lebih besar sehingga meminimalkan kerusakan pada tengkorak ternak.
- Stunning yang humanis hanya dengan satu kali pengoperasian.
- Kecepatan bolt 5–10% lebih tinggi.
- Hasil stunning lebih optimal untuk meningkatkan kualitas daging.
- Kontak ke kepala lebih akurat.
- Mudah dioperasikan dan mengurangi kelelahan operator.
- Mudah diperbaiki, dirawat, dan dibersihkan.
- Bobot ringan, hanya 36 lb (16,5 kg).

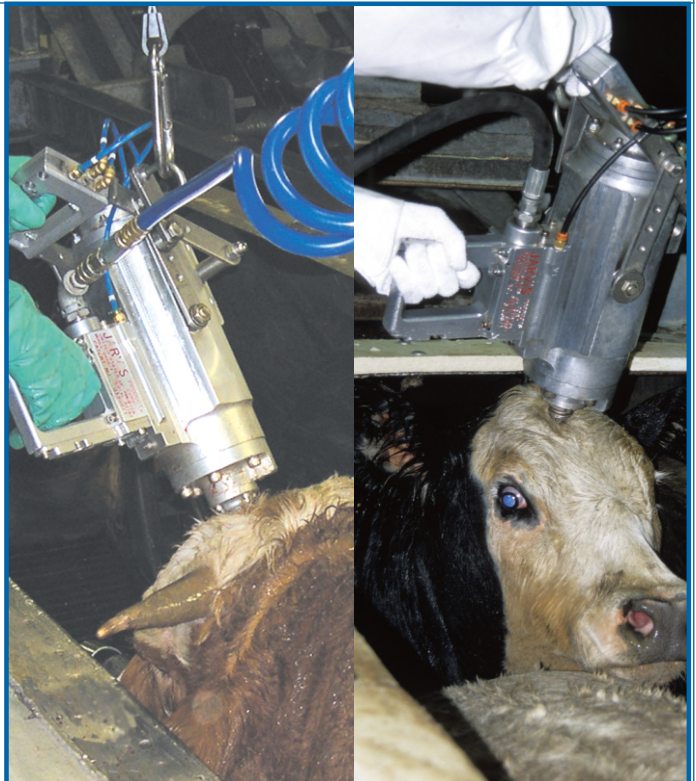

HEADQUARTER

PT ARSI INDO GRAHA
INDONESIA

☎ +6281270762750
✉ info@arsiindograha.com
🌐 www.arsiindograha.com

GLOBAL OFFICE

RC INDO GROUP LIMITED
RWANDA

☎ +250793885693
✉ info@rcrwanda.com
🌐 www.rcrwanda.com

ARSYI GLOBAL L.L.C-FZ
DUBAI

☎ +971507169760
✉ info@arsyi.com
🌐 www.arsyi.com

NON-PENETRATING PNEUMATIC STUNNER

MODEL USSS-22A

Part Number : 4044135

Model USSS-22A		
Tekanan Operasi Normal	190 - 245 psi	13.1 - 16.9 bar
Tekanan Operasi Maksimum	250 psi	17.2 bar
Konsumsi Udara per Siklus @175 psi (12,1 bar)	0.63 - 0.83 ft ³	17.8 - 23.5L
Diameter Striking End Tipe Non-Penetrasi	2.125 in	54 mm
Diameter Rod Shaft	1.375 in	35 mm
Kecepatan Shaft @175 psi (12.1 bar)	95 ft / /sec	29 m / sec
Tuas Pengendali	Pelatuk Ganda / Pegangan Ganda	Pneumatik
Dimensi Keseluruhan (P x L x T)	20.9 x 9 x 17.5 in	531 x 229 x 445 mm
Berat (knocker box side handle)	37.2 lbs	16.9 kg
Berat (knocker box rear handle)	39.2 lbs	17.8 kg
Berat (restrainer rear handle)	37.8 lbs	17.1 kg

Pilihan Peralatan dan Aksesori		Nomor Pemesanan
Model USSS-22A Non-Penetrating Pneumatic Stunner	Untuk digunakan pada restrainer, rear handle knocker box, dan side handle knocker box	4044135 4044136 4044137
Air Compressor (250 psi)	5 hp	10 hp
460 V / 60 Hz 380 V / 50 Hz 575 V / 60 Hz 380 V / 60 Hz 415 V / 50 Hz 230 V / 60 Hz 220 V / 50 Hz	4061361 4061362 4061363 4061364 4061378 4061376 4061377	4061366 4061379 4061382 4061380
Model AST-112 Stunner Tester (termasuk Test Stand dan Control Box)		
	115V 230V	4016025 4016026
Model MSPR-1 Three-Way Pressure Setting Air Regulator, dengan Filter dan Lubricator		
	120 V 230 V	3063663 3063664
Air Hose Assembly (25 ft / 7.6 m)		
	Coiled Straight	3059045
Air Filter-Regulator-Lubricator 3022100		3022100
Balancer		4042035



HEADQUARTER

PT ARSI INDO GRAHA
INDONESIA

+6281270762750

info@arsiindograha.com

www.arsiindograha.com

GLOBAL OFFICE

RC INDO GROUP LIMITED
RWANDA

+250793885693

info@rcrwanda.com

www.rcrwanda.com

ARSYI GLOBAL L.L.C-FZ
DUBAI

+971507169760

info@arsyi.com

www.arsyi.com